

# Cipothane 4K

## 4 Component PU modified for high abrasion flooring



### Description

Cipothane 4K is a four component, solvent-free, PU based coating system recommended for car parks, consisting of resin, hardener, aggregates and epi. Cipothane 4K is PU modified coating with good flexibility for crack bridging ability, excellent toughness and wear resistance.

### Uses

- Car park coating for intermediate decks, and basements floors.

### Key feature

- Solvent free
- High abrasion resistance
- Moderate flexibility
- Anti slip



**Certified**

### Properties

Type	: PU based	Mixing ratio	: Pre-weighed packs
Finish	: Glossy	Colour	: Desired shade
Pot life @ 27°C ASTM D 2471	: 40- 50 minutes	Solids content by wt ASTM D 2369	: 98%
Drying time ASTM D 1640		Recommended DFT ASTM D 7091	: 300 - 600 microns
Surface dry	: ≥ 120 minutes	Application	: By roller / brush
Tack free dry	: ≥ 7 hrs		
Hard dry	: ≥ 24 hrs	Shelf life	: 6 months in the unopened container
Recommended thinner	: PUT 502 (Clean up)		

### Performance data

**The mandatory performance parameters as per FeFRA and EFNARC guidelines for resin flooring system**

Pull of adhesion test ASTM D 7234-2022	: ≥ 2 MPa for M20 grade concrete / Concrete failure
Impact resistance ASTM D 2794-1993	: Pass (1.8 kg - 100 cm)
Abrasion resistance ASTM D 4060-2019 CS 17, 1 kg 1000 cycles	: Maximum 55 mg loss

### Other mechanical properties

Tensile strength ASTM D 638	: 8 MPa
Elongation ASTM D 638	: 2.5%
Flexural strength ASTM D 790	: 8 MPa
Crack bridging ability EN 1062-7-2004(A)	: 0.81 mm
Pendulum test - slip resistance BS 8204	: 69 (very low risk of slip)

**Note :** The typical physical properties given above are derived from testing in a controlled laboratory environment. Results derived from testing field-applied samples may vary, dependent on actual site conditions

Ref : Dr Cipy/Flooring/2023/46

TYPE 4 EFNARC GUIDELINE

MULTI LAYER FLOOR COATING

# Cipothane 4K

## 4 Component PU modified for high abrasion flooring



### APPLICATION INSTRUCTIONS

#### Surface preparation

The long-term durability of the applied Cipothane 4K is dependent upon the adhesive bond achieved between the flooring material and substrate. It is most important therefore, that substrate surfaces are correctly prepared prior to application. Ensure that the residual moisture level in the concrete is below 5%. All substrates should be sound and free from contamination such as mortar and paint splashes, curing compound residue, oil, or grease. Excessive laitance should be removed by light mechanical scrubbing, grinding or grit blasting. Oil and grease contamination must be completely removed by grinding down to sound, clean concrete. Alternatively, blasting techniques can be used to provide the required substrate.

#### Priming

Prepared substrates to be treated with Cipothane 4K, should be primed with Cipoxy 17/18. Primer should be mixed in the proportions supplied by adding the entire contents of hardener can to the base can. Once mixed the material should be immediately applied in a thin, continuous film using stiff brushes or rollers. Over application and puddles should be avoided. Porous floors may require two coats of primer. It should be allowed to become tack free. Primer coverage will depend on the texture and porosity of the substrate and also the application thickness.

#### Mixing & Application

Cipothane 4K is supplied in pre-weighed packs ready to use on site. Solvent or thinners should not be added. Mix all the components of Cipothane 4K in a clean bowl and stir for 2-3 minutes using slow speed mixer. The material is poured over broadcasted surface and spread to the desired thickness by using pain roller. Allow to cure for 24 hours.

#### Packaging and coverage

Cipothane 4K	:	Pre-weighed set of 22.8 kgs	:	1 Ltr covers 1.9 sq.m @ 500 micron thickness.
EPI	:	Pre-weighed set of 0.8 kgs		
Cipoxy 17 /	:	Resin and Hardener available	:	1 litre covers 5 sqm @ 200 microns
Cipoxy 18	:	in 20 litre packing		

#### Storage and handling

The product should be stored in accordance with national regulations. It should be kept in a cool, well ventilated area, away from heat, direct sunlight, sparks and children. Handle with care. Ideal temperature for storage of the material is 25°C to 30°C, in a covered shed.

#### Do's

- Clean regularly
- Remove aggressive chemical spillage immediately
- Maintain wheel for proper rolling, should not getdragged.
- Handle heavy material gently and cautiously
- Clean any oil or any liquid which may cause accident during people's movement

#### Don't

- Drag any sharp and heavy object
- Expose to fire or welding spark
- Expose to very high temperature than recommended by Manufacturer
- Drop down and heavy material on the floor
- Expose to highly corrosive chemicals

#### Health and safety precautions

Please refer to MSDS. Observe reasonable care and employ ordinary hygienic principles such as washing the hands with soap and water before eating or smoking. It is recommended to wear gloves, goggles and nose masks while application. Incase of splashes on the skin, dampen the cloth with thinner PUT 503 and wipe the hands with the cloth. Wash then with soap.

# Cipothane 4K

4 Component PU modified for high abrasion flooring




## Limitations

It is not compatible for application over asphalt, unmodified sand-cement screeds or PVC tiles and sheets. Cipothane 4K coating laid floor will be scratched due to nails or sharp objects protruding from machinery, packings, or trolleys moving on the floor. Presence of sand will also cause abrasion. The product is not advised to be applied below 15°C as the flow reduces. While applying the product above 35°C, there can be a problem of low pot life etc., and it will be difficult to apply the material. Cured product is not suitable for exposure to sub-zero temperatures and above 65°C. When there is not enough material in a given area, roller marks caused due to spiked rolling may not close which will result in an undesirable finish. The product is not suitable for areas exposed to direct sunlight

## Other Products Categories available

Dr.Cipy brings you the widest range of Flooring Systems

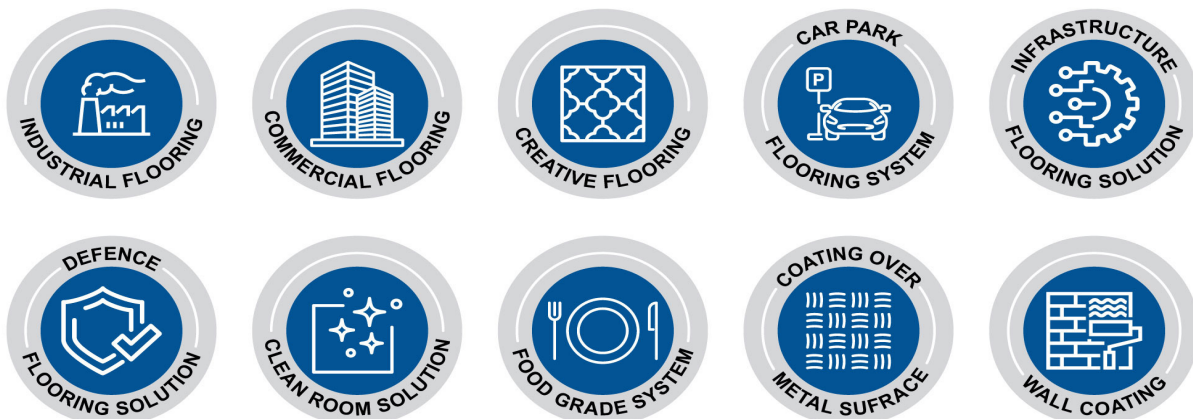

**Pidilite Industries Ltd.**

T-127, MIDC, Bhosari, Pune - 411 026

Tel. +91-20-66316400

Email : drcipy@pidilite.com

**DISCLAIMER:** All information contained in this data sheet is given to the best of our knowledge but no warranty is made with respect thereto. This data sheet becomes invalid as soon as a new edition has been published. Please contact us for latest edition. Description and advice regarding Cipy's products are based on long term field and laboratory tests carried out by us. No condition of warranty is given covering the results from the use of materials in the circumstances of any particular application, because the storage, handling and application of the materials are beyond our control.